INSTALLATION

To prevent malfunction and/or damage to speaker or other devices, always turn down the volume, and turn off the power on all devices before making any connections.

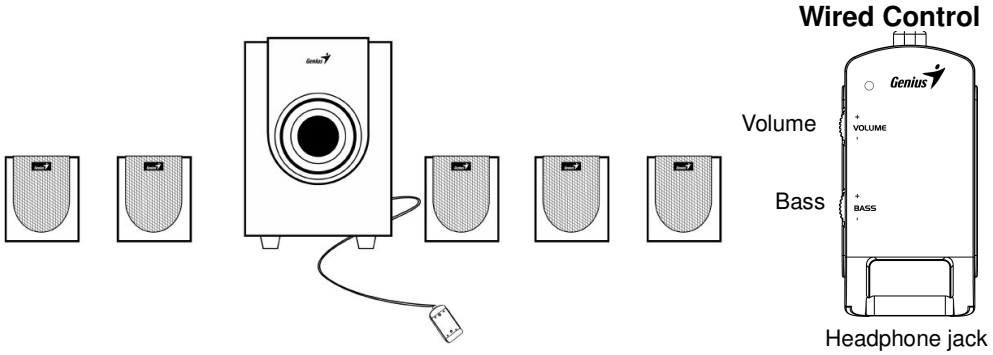

(A) Connecting the speakers to the Subwoofer

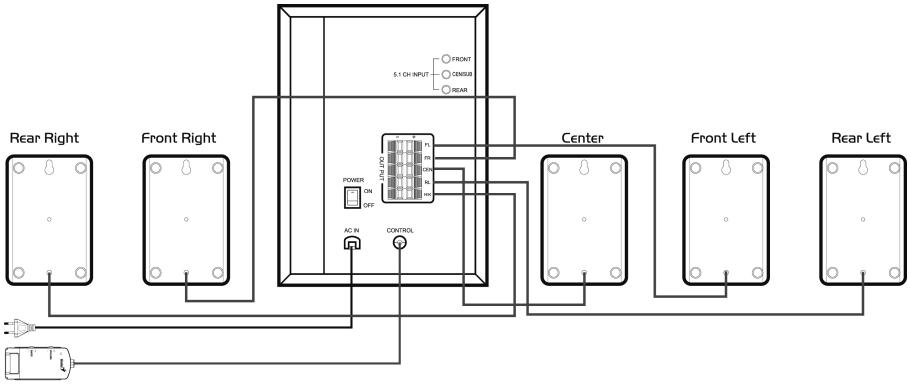

For the five sets of wires included: use the black/white wire to connect to the RED positive terminals and use the black wire the BLACK negative terminals on the back of the subwoofer and speakers as explained below.

1. Connect the *FR* speaker to the *OUTPUT-FRONT (R)* spring tags of the subwoofer.
2. Connect the *FL* speaker to the *OUTPUT-FRONT (L)* spring tags of the subwoofer.
3. Connect the *SR* speaker to the *OUTPUT-SURROUND (R)* spring tags of the subwoofer.
4. Connect the *SL* speaker to the *OUTPUT-SURROUND (L)* spring tags of the subwoofer.
5. Connect the *CEN* speaker to the *OUTPUT-CEN* spring tags of the subwoofer.

(B) Connecting the Subwoofer to other Audio Sources

- **Connections of the subwoofer and the Audio devices for PC 5.1 channel Audio**

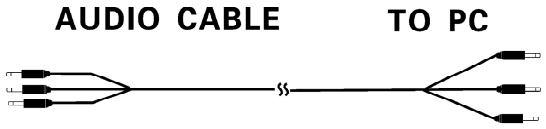

Plug in the 3.5mm-to-3.5mm cable by colors (green, orange, black) then connect them to the PC using the 5.1 channel rule.

- **To DVD Player**

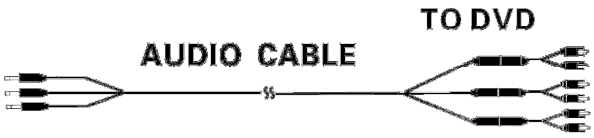

Plug in the **3.5mm-to-RCA** cable (by colors), then connect them to the DVD player using the 5.1 channel rule**.**

After you finish A and B above, you can turn on the “Power” on the subwoofer to experience the 5.1CH speakers with powerful bass surround sound.